


FILTRI

PANAMA TOP / PANAMA TOP

- Pressione massima d'utilizzo 2 Bar
- Tubazione interne da Ø 50 mm
- Valvola 6 vie con manometro
- Corpo in polietilene
- Valvola per scarico rapido

- maximum use of 2 Bar
- pipe internal from Ø 50 mm
- 6-way valve with gauge
- body made of polyethylene
- quick exhaust valve

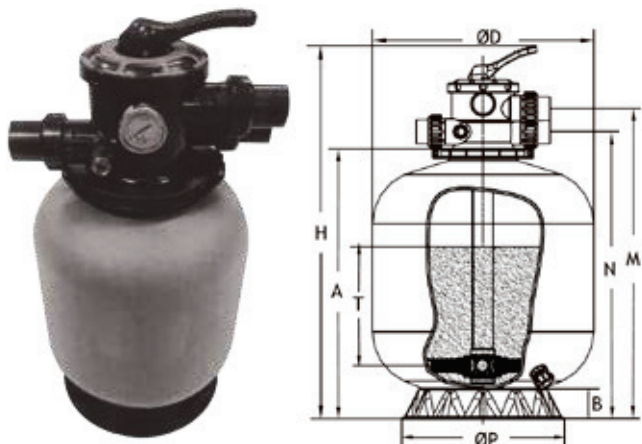

DIMENSIONI / DIMENSIONS

Modello	Ø D mm	H mm	A mm	B mm	M mm	N mm	ØP mm	T mm
400	400	765	503	73	609	554	320	160
500	533	870	600	75	709	654	390	260
650	635	965	700	95	809	754	565	370

Codice	Modello	Ø mm	Attacchi in/out mm	Portata m3/h	Sabbia Kg
1080350	Filtro Panama top 400 / filter top 400	400	50 (1 1/2)	6	35
1080351	Filtro Panama top 500 / filter top 500	533	50 (1 1/2)	10	85
1080352	Filtro Panama top 650 / filter top 650	635	50 (1 1/2)	15	145

PANAMA SIDE SP / PANAMA SIDE SP



- Pressione massima d'utilizzo 2 Bar
- Tubazione interne da Ø 50 mm
- Valvola 6 vie con manometro
- Corpo in polietilene
- Valvola per scarico rapido

- maximum use of 2 Bar
- pipe internal from Ø 50 mm
- 6-way valve with gauge
- body made of polyethylene
- quick exhaust valve

DIMENSIONI / DIMENSIONS

Modello	Ø D mm	H mm	A mm	B mm	M mm	N mm	ØP mm	T mm
450	450	665	260	75	125	90	390	250
500	533	712	280	75	125	90	390	280
650	635	810	310	95	125	90	565	300

Codice	Modello	Ø mm	Attacchi in/out mm	Portata m3/h	Sabbia Kg
1080355	Filtro Panama side 450/ filter side 450	450	50 (1 1/2)	8	45
1080353	Filtro Panama side 500/ filter side 500	533	50 (1 1/2)	10	85
1080354	Filtro Panama side 650/ filter side 650	635	50 (1 1/2)	15	145